


## 2002 ODYSSEY - Front Bumper Removal/Installation

**NOTE:**

- Have an assistant help you when removing the front bumper.
  - Take care not to scratch the front bumper and body.
  - Put on gloves to protect your hands.
1. Remove the front bulkhead cover.
  2. Remove the front bumper (A):
    - 1 Remove the bolts (B) and clips (C) securing the front bumper, inner fender (D) and splash shield (E).
    - 2 Remove the screws (F), then pull both side wheel arch portions of the bumper outward to detach them from the side clips (G).
    - 3 With the help of an assistant, pull the front bumper forward to release the hooks (H) from both corner upper beams (I), then remove the front bumper.

**Fastener Locations**


**B** ▶ : Bolt, 2



**F** ▶ : Screw, 2




**C** ▷ : Clip, 4

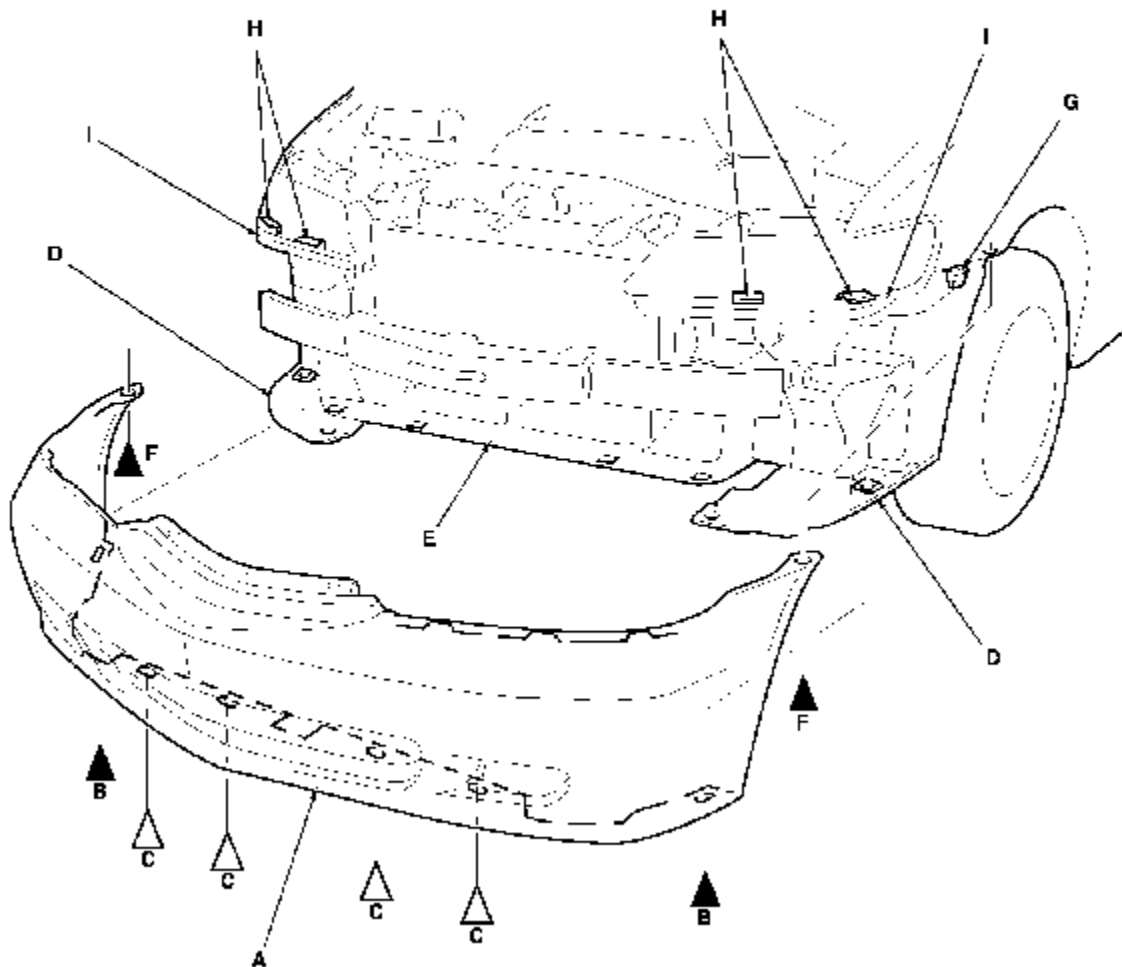

3. Remove the bolts (A, B), then remove the front bumper beam (C) and both corner upper beams (D). If necessary, remove the absorber (E).
4. Install the front bumper in the reverse order of removal, and note these items:
  - Make sure the front bumper engages the side clips, and the hooks (of the center and corner upper beams) on each side securely.
  - Replace any damaged clips.
  - Push the clips into place securely.

### Fastener Locations

**A ▶** : Bolt, 6



**B ▶** : Bolt, 6

