


Window Regulator: Service and Repair Trim Panel Replacement - Side Front Door

TOOLS REQUIRED


- J 36796 Clip Zip Tool
- J 38778 Door Trim Pad Clip Remover

REMOVAL PROCEDURE

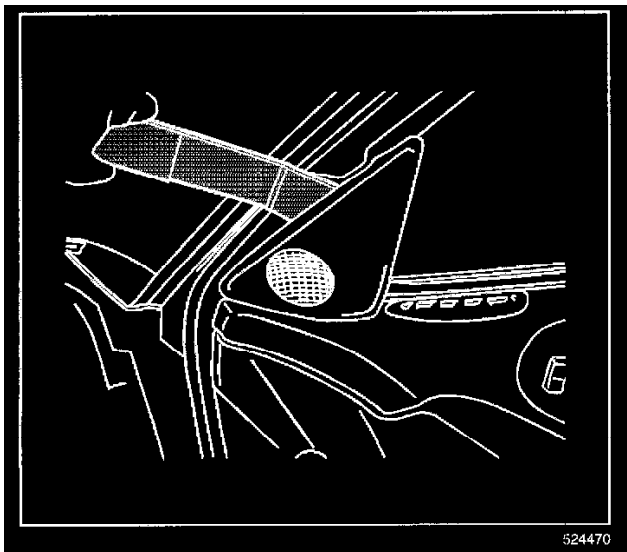

1. Remove the inside door handle bezel.
2. Remove the upper door trim panel.
 - 2.1. Use the J 38778 in order to release the retainer at the top of the upper door trim panel.
 - 2.2. Lift the upper door trim panel upwards in order to remove.
 - 2.3. Disconnect the wire harness to the tweeter.

INSTALLATION PROCEDURE

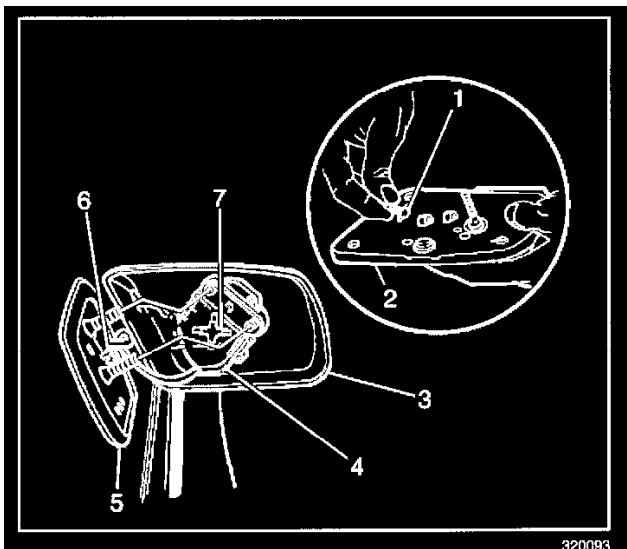

1. Snap the jack screws (1) into the power drive unit (4).
2. Push the mirror assembly in close to the power drive unit (4).
3. Align the swivel (6) on the power drive unit (4) to the pivot points in the mirror backing plate.
4. Push in the backing plate until a click is heard.